



YANMAR®



MARINE TRANSMISSION


KMH61V (Hydraulic Clutch)

SPECIFICATIONS

MODEL	KMH61V				
Clutch Type	Hydraulically actuated multi-disc clutch				
Input torque capacity Nm (ft lb) (max. rpm)	1070Nm (790 ft lb) (5500 rpm)				
Reduction ratio	Forward	1.24	1.49	1.98	2.43
	Reverse	1.24	1.49	1.98	2.43
Direction of rotation	Input shaft	Counter-clockwise			
(viewed from stern)	Output shaft	Clockwise and Counter-clockwise			
Lubricating oil	SAE #30 (single grade oil)				
Lubricating oil capacity	8.0 liter (8.48 qt)				
Dry weight	8 kg (181 lb)				

SAE #3 is standard flange. (Option: Other SAE# alternatively Borg Warner size available) Trolling Valve and/or PTO available as option.

Power Diagram for Pleasure Use

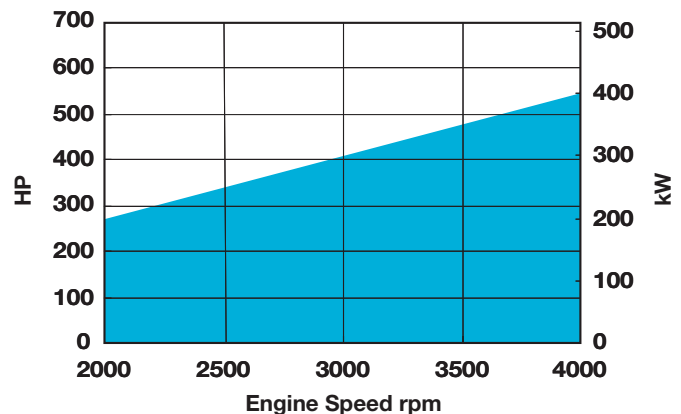

YANMAR®

Address: Brugplein 11
1332 BS Almere
Netherlands

Postaddress: Postbus 30112
1303 AC Almere
Netherlands

Internet: www.yanmarmarine.com

