



# YANMAR®



## MARINE TRANSMISSION


### KMH60A/61A (Hydraulic Clutch)

#### SPECIFICATIONS

| MODEL  | KMH60A   | KMH61A                        |
|--|--|-------------------------------|
| <b>Clutch Type</b>                                 | Hydraulically actuated multi-disc clutch                         |                               |
| <b>Input torque capacity Nm (ft lb) (max. rpm)</b> | 960 Nm (710 ft lb) (5500 rpm)                                    | 1070Nm (790 ft lb) (5500 rpm) |
| <b>Reduction ratio</b>                             |  |                               |
| <b>Forward</b>                                     | 1.55   2.04   2.43   | 1.55   2.04   2.43            |
| <b>Reverse</b>                                     | 1.55   2.04   2.43   | 1.55   2.04   2.43            |
| <b>Direction of rotation</b>                       |  |                               |
| <b>Input shaft</b>                                 | Counter-clockwise  |                               |
| <b>Output shaft</b>                                | Clockwise and Counter-clockwise                                  |                               |
| <b>Lubricating oil</b>                             | SAE #30 (single grade oil)                                       |                               |
| <b>Lubricating oil capacity</b>                    | 2.8 liter (3 qt)   |                               |
| <b>Dry weight</b>                                  | 58 kg (128 lb) <small>(with flange SAE #3, without foot)</small> |                               |

"SAE #3 is standard flange". (Option: Other SAE# alternatively Borg Warner size available) Trolling Valve and/or PTO available as option.

Power Diagram for Pleasure Use

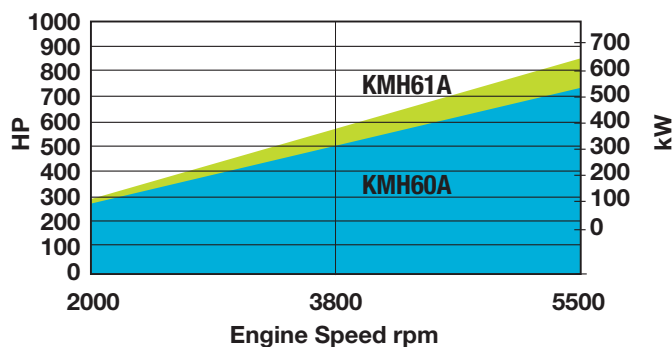

## YANMAR®

Address: Brugplein 11  
1332 BS Almere  
Netherlands

Postaddress: Postbus 30112  
1303 AC Almere  
Netherlands

Internet: [www.yanmarmarine.com](http://www.yanmarmarine.com)

